

IBEX

HIGH TECHNOLOGY SOLAR MODULES

IBEX-120MHC-DUO

330/335/340/345/350/355

9BB HALF-CELL MONO PV MODULE

SWISS SOLAR

IBEX HIGH EFFICIENCY MONOCRYSTALLINE SOLAR MODULES WITH HALF CELL TECHNOLOGY

0+5 Positive power tolerance (0+5W) guaranteed



High performance under low light.
Works at cloudy, rainy days



The monolithic perc cell structure technology (low resistance characteristics) is adopted (the maximum conversion efficiency of modules is up to 20.82%)



EXTREME WEATHER RATING. High-tech aluminium alloy frame, certified for high snow (5400 Pa) and wind loads (2400 Pa)



Reduced resistance between cells Less micro cracks, higher output power



SUPER STRONG FRAME. The overflow tank is waterproof with double layers. Aluminum frame enhances the mechanical load strength by 10%

IBEX 120MHC-DUO 330-355

MONOCRYSTALLINE SOLAR MODULE

ELECTRICAL DATA AT STC

	330	335	340	345	350	355
Rated power P _{mpp} [Wp]	330	335	340	345	350	355
P _{mpp} range to	0/+5W	0/+5W	0/+5W	0/+5W	0/+5W	0/+5W
Rated current I _{mp} [A]	9.76A	9.85A	9.94A	10.03A	10.12A	10.20A
Rated voltage V _{mpp} [V]	33.8V	34.0V	34.2V	34.4V	34.6V	34.8V
Short-circuit current I _{sc} [A]	10.30A	10.39A	10.48A	10.57A	10.66A	10.74A
Open-circuit voltage U _{oc} [V]	41.6V	41.8V	42.0V	42.3V	42.5V	42.7V
Efficiency at STC up to	19.36%	19.65%	19.94%	20.24%	20.53%	20.82%
Application Class	Class A	Class A	Class A	Class A	Class A	Class A

Specification as per STC (Standard test conditions): irradiance 1000 W/m² | module temperature 25°C | Air Mass = 1.5

ELECTRICAL DATA AT NOCT

Power at P _{mpp} [Wp]	248.1	251.8	255.6	259.3	263.1	266.8
Rated current I _{mp} [A]	7.90	7.97	8.04	8.11	8.18	8.24
Rated voltage V _{mpp} [V]	31.40	31.60	31.80	32.00	32.20	32.40
Short-circuit I _{sc} [A]	8.34	8.41	8.48	8.56	8.63	8.70
Open-circuit voltage U _{oc} [V]	38.8	39.0	39.2	39.4	39.6	39.8

NOCT (nominal operating cell temperature): irradiance 800 W/m² | Wind speed 1 m/sec | Ambient temperature | 20°C cell operating temperature 45 +/-2°C | Air Mass = 1.5

LIMITING VALUES

Max. system voltage [V]	1500V DC (IEC)
Max. return current [I]	20A
Operating Temperature	- 40 to +85°C
Max. tested pressure load [Pa] ²	5400
Max. tested tensile load [Pa] ²	2400

TEMPERATURE COEFFICIENT

I _{sc}	V _{oc}	P _{max}
0.05% /°C	-0.28% /°C	-0.36% /°C



SPECIFICATIONS

Number of cells	120 (6 x 20) 158,75 x 79,375 mm
Dimensions	1698 x 1004 x 35 mm
Weight	19 kg
Front-side glass	3.2 mm tempered Low Iron Glass
Frame	Stable, anodised aluminium frame, black
Junction box	Split Junction Box (IP68)
Cable	4 mm ² , +300mm,-300mm Cust.Length
Diodes	3 Diodes
Plug-in connection	MC4 Compatible
Hail test (max. hailstrom)	Ø45mm 23 m/s 83 km/h

PACKING CONFIGURATION

Container	40 HQ	Pieces Per Pallet	30
Pallets Per container	26	Pieces per Container	780

The specifications and average values can vary slightly. Relevant is the corresponding data of the individual measurement. Specifications are subject to change without notice. Measurement tolerance depending on equipment: rated power +/- 3%, other values +/- 10%. All information given in this data sheet corresponds to DIN EN 50380. A potential light-induced degradation of the power after commissioning is not considered here. Further information in the installation manuals. 1 The specific warranty conditions are given under www.swissenergy-solar.ch | 2 Horizontal mounted | 3 Tolerance L/W = +/- 3 mm. H +/-2mm, the dimensions given in the order confirmation will be decisive | 4 Location and dimensions of holes on request

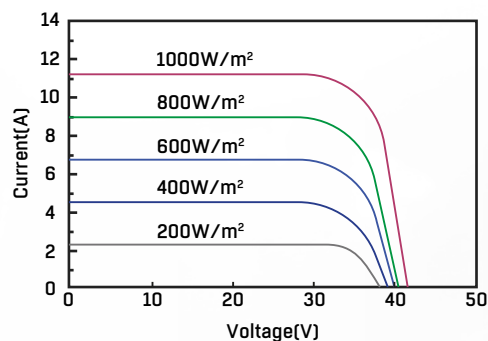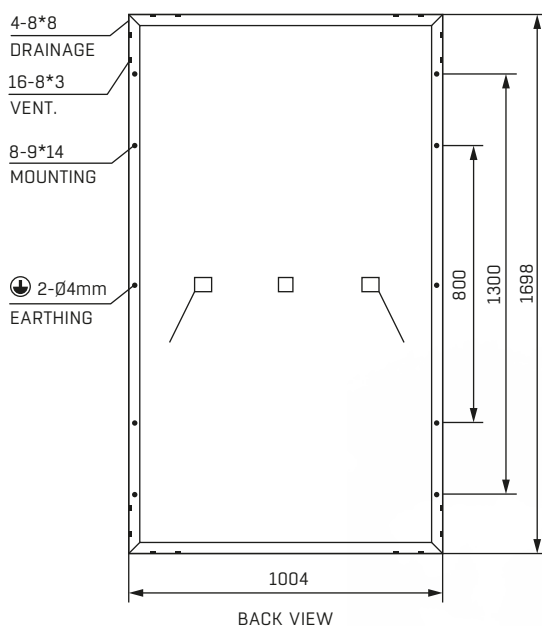

WARRANTY

20 YEARS
PRODUCT WARRANTY

30 YEARS
POWER WARRANTY

swiss solar